

TECHNICAL DATA  
DATA SHEET 4002, REV. A


**60KW / 90KW Bi-directional Series**

**Application:**

- Aircraft AC Power Bus
- AC Power Protection
- Shipboard (Line-Line)
- Differential AC power Bus

**Protection Level:**

+200VDC operating; Tailored for 115VAC  
Exceed MIL-STD704A and DOD-STD-1399 requirements  
UL-94V0 Flammability Classification



**60KW:**

Rating	Condition	Minimum	Maximum	Units
Peak Pulse Power Dissipation	@ 25°C, 1ms	-	60,000	Watts
Steady State Power Dissipation	@ 25°C	-	10	Watts
T <sub>clamping</sub>	0 Volts to V <sub>(BR)</sub>	-	< 1x 10 <sup>-8</sup>	Seconds
Operating & Storage Temp.	-	-55	+ 150	°C
Capacitance	@ 0V DC	-	170	pF

Part Number	Reverse Stand-Off Voltage V <sub>WM</sub> (Volts)	Maximum Reverse Leakage @ V <sub>wm</sub> I <sub>D</sub> (µA)	Minimum Breakdown Voltage @ 1 mA V <sub>(BR)</sub> (Volts)	Maximum Clamping Voltage @ I <sub>PP</sub> V <sub>c</sub> (Volts)	Maximum Peak Pulse Current I <sub>PP</sub> (Amps)
60KS200C	180	10	200 ~ 225	335	180


**90KW:**

Rating	Condition	Minimum	Maximum	Units
Peak Pulse Power Dissipation	@ 25°C, 1ms	-	90,000	Watts
Steady State Power Dissipation	@ 25°C	-	10	Watts
T <sub>clamping</sub>	0 Volts to V <sub>(BR)</sub>	-	< 1x 10 <sup>-8</sup>	Seconds
Operating & Storage Temp.	-	-65	+ 150	°C
Capacitance	@ 0V DC	-	170	pF

Part Number	Reverse Stand-Off Voltage V <sub>WM</sub> (Volts)	Maximum Reverse Leakage @ V <sub>wm</sub> I <sub>D</sub> (µA)	Minimum Breakdown Voltage @ 1 mA V <sub>(BR)</sub> (Volts)	Maximum Clamping Voltage @ I <sub>PP</sub> V <sub>c</sub> (Volts)	Maximum Peak Pulse Current I <sub>PP</sub> (Amps)
90KS200C	180	0.5	200 ~ 225	280	180
90KS200	180	10	200 ~ 225	335	270

**TECHNICAL DATA**  
**DATA SHEET 4002, REV. A**

BOTTOM VIEW

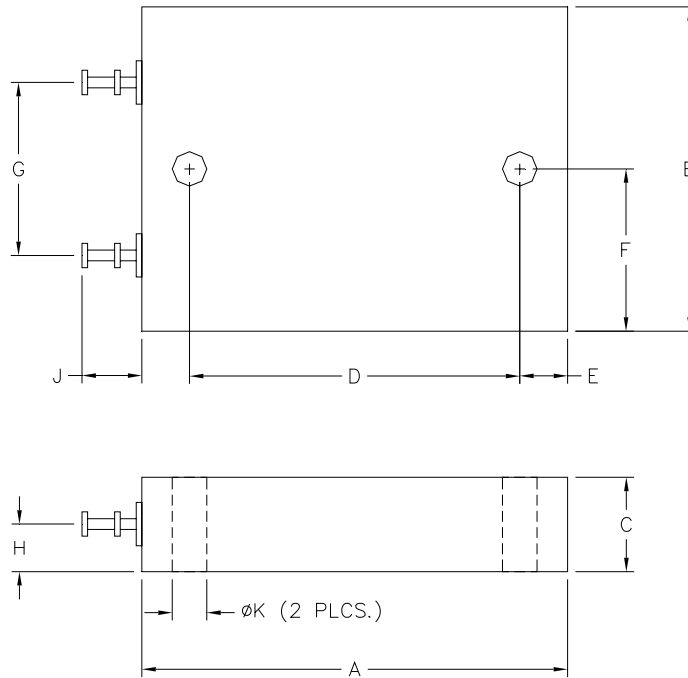

DIM.	90KS200C		DIMENSIONS		NOTE
	INCHES		MM		
	MIN.	MAX.	MIN.	MAX.	
A	2.220	2.500	56.3	63.50	
B	1.350	1.900	34.20	48.30	
C	0.470	0.550	11.90	13.90	
D	1.880	1.920	47.80	48.80	
E	0.135	0.300	3.40	7.60	
F	0.660	0.950	16.70	24.10	
G	0.980	1.020	24.90	25.90	
H	0.260	0.290	6.50	7.50	
J	0.325	0.365	8.20	9.30	
K	0.193	0.205	5.35	5.65	DIA.

DIM.	60KS200C		DIMENSIONS		NOTE
	INCHES		MM		
	MIN.	MAX.	MIN.	MAX.	
A	2.220	2.280	56.30	58.00	
B	1.350	1.400	34.20	35.60	
C	0.470	0.530	11.90	13.50	
D	1.930	1.970	49.00	50.10	
E	0.135	0.165	3.40	4.20	
F	0.660	0.720	16.70	18.30	
G	0.770	0.830	19.50	21.10	
H	0.220	0.280	5.50	7.20	
J	0.325	0.365	8.20	9.30	
K	0.120	0.130	3.00	3.30	DIA.

TECHNICAL DATA  
DATA SHEET 4002, REV. A

**DISCLAIMER:**

- 1- *The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).*
- 2- *In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.*
- 3- *In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.*
- 4- *In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.*
- 5- *No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.*
- 6- *The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.*
- 7- *The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.*